

# Villas system solution EXPORT


## Waterproofing for buildings /cellar

filling system with 1-component sealing mass against wetness out of soil and seepage water

.....the system solution

.....the products

.....the application method

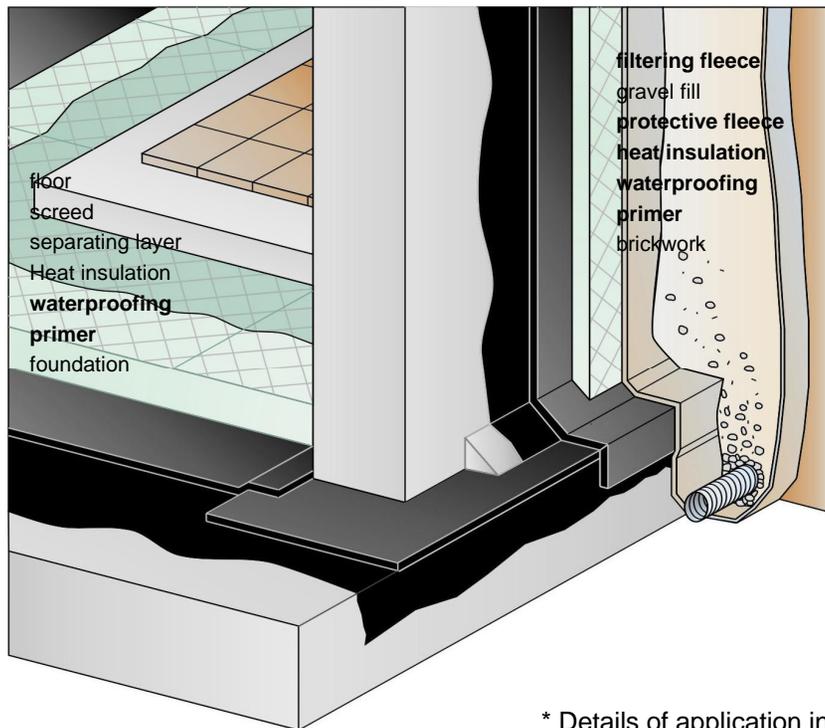

### filling system\*

- **Villaverde FSV 150**
- **Styrodur 3035 CS**
- **Villafalt 1K Plus\*\*** approx. 2,5 l/m<sup>2</sup>
- **Villas Glasseidengewebe**
- **Villafalt 1K Plus\*\*** approx. 2,5 l/m<sup>2</sup>
- **Emulbit\*\***

filtering- and protective synthetic fiber fleece

perimeter heat insulation, possible fixed with PeriPad „Klebetüfel“ 5-6 pieces. / board (max. board dimension 1m<sup>2</sup>)

applying in one operation approx. 3 mm surrounding in the wet first layer

applying in one operation approx. 3 mm approx.0,3 kg/m<sup>2</sup> brushing, rolling, spraying

\* Details of application in according to ÖNORM B 7209 are to observe!

\*\* Attentione, not resistant against frost, product information are to observe!

\*\* Thickness of dry layers in according to ÖNORM B 2209-1 min. 5 mm

Die Anwendungsempfehlungen entsprechen den gültigen Normen und Regelwerken, eine Verbindlichkeit kann nicht abgeleitet werden.

**VILLAS.**